


M002 ROX-12 12 Channel Relay Output Extender Module

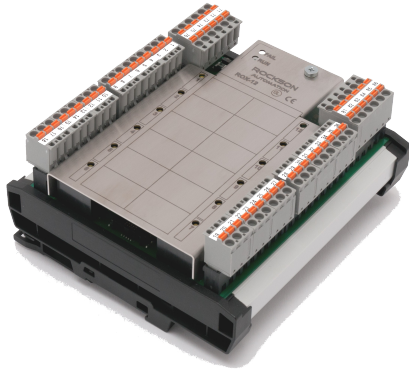

Features

- Cost-effective extender to Input Modules CI32 and MI8
- 12 single-pole double-throw contacts
- Heavy-duty contacts with large safety margin
- Detachable terminal blocks per channel
- Redundant power supply inputs
- Easy replacing

Specifications

Physical

Size W x H x D	128 x 140 x 65 mm
Mounting	35 mm DIN rail
Protection	IP20 Front/Rear panel seat
Weight	453 g

Power supply

Supply voltage range	18 – 32 V DC
Power consumption	8 W

relay contact

Contact form	SPDT, Form C
Contact rating	32 V / 2 A

Agency Approvals

EMI	IEC 60945 Chapters 9.2, 9.3
EMS	EN61000-4-2 (ESD), level 3
	EN61000-4-3 (RS), level 3
	EN61000-4-4 (EFT), level 3
	EN61000-4-5 (Surge), level 2
	EN61000-4-6 (CS), level 2
Vibration	IEC60068-2-6
Dry Heat	IEC60068-2-2
Humidity	IEC60068-2-30
Low Temperature	IEC60068-2-1
Maritime Specifications	DNV GL, LR, IACS, BV