


M005 XAP eXtension Alarm Panel (M005-1)

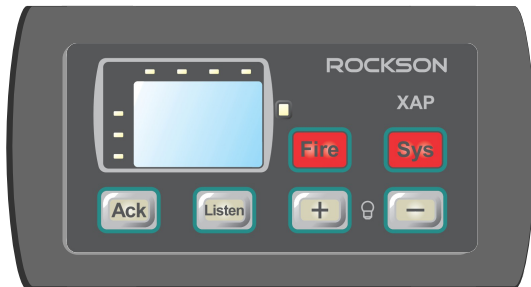

Features

- Cost-efficient client for XA server
- Graphic display with multi language status description
- Alarm group and status LEDs
- Acoustic acknowledge button, lamp test and dimming
- Duty function, listen function for duty monitoring
- Fire and system fail indication
- Flush or wall mounting installation
- Connector for bedroom buzzer

Specifications

Physical

Size W x H x D	144 x 72 x 40 mm
Mounting	Flush or wall mounting installation
Protection	IP20
Weight	160 g

Power supply

Supply voltage range	18 – 32 V DC
Power consumption	8 W

Indicators

LEDs	Alarm group and measuring point status
Graphical Display	Multilanguage status description
Audible Alarm	≥ 75 dB (A) / 1 m

field buses

Electrical	RS485
Protocol	Modbus RTU

Agency Approvals

EMI	IEC 60945 Chapters 9.2, 9.3
EMS	EN61000-4-2 (ESD), level 3
	EN61000-4-3 (RS), level 3
	EN61000-4-4 (EFT), level 3
	EN61000-4-5 (Surge), level 2
	EN61000-4-6 (CS), level 2
Vibration	IEC60068-2-6
Dry Heat	IEC60068-2-2
Humidity	IEC60068-2-30
Low Temperature	IEC60068-2-1
Maritime Specifications	DNV GL, LR, IACS, BV